


PSD300-WiNet APP Operation Guide

My Livoltek APP Deployment Process

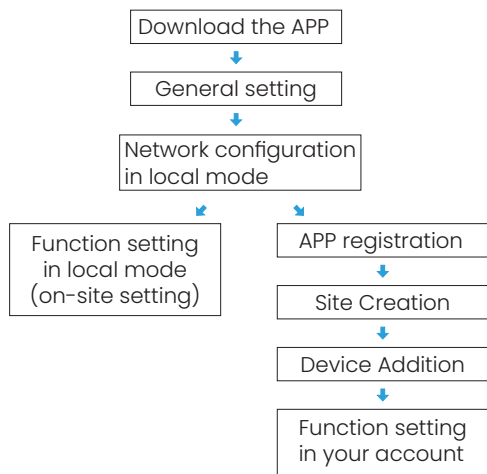

- Function setting in local mode is recommended for installers' on-site APP operation.
- If you already have an account, skip APP registration, create a site in your account, add the device into the site and perform function setting.
- For inverters, when the inverter is powered on for the first time, you can perform some initial parameter setting such as work mode, grid standard code, feed-in limitation and etc. in function setting interface.

1 APP Downloading




Downloading My livoltek APP

- Search for **My Livoltek** on **APPLE APP Store**, **Google Play**.
- Or scan the QR code to download the APP.



2 General Setting



- Enable the location services on your phone.
- Set APP system language.
- Set APP server.

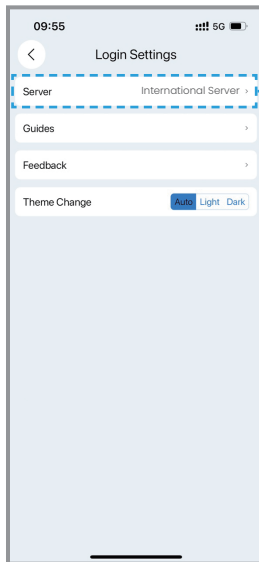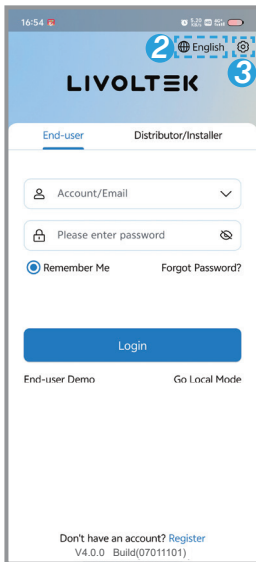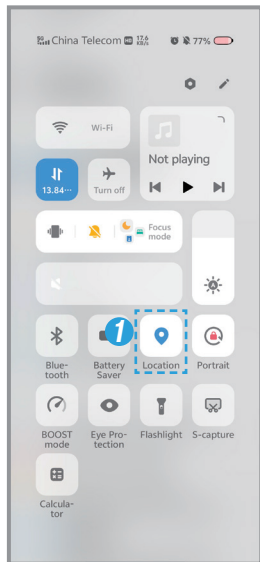

- **For Asia, Latin American, Australia and others**
International server:
<https://www.livoltex-portal.com/>
- **For Europe, Middle East Regions, Africa**
EU&MEA server
<https://evs.livoltex-portal.com/>

3 Network Configuration

- Click **Go Local Mode** > **Wi-Fi Mode** to enter **Local Access** interface.

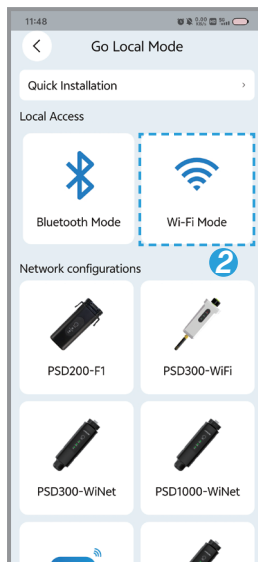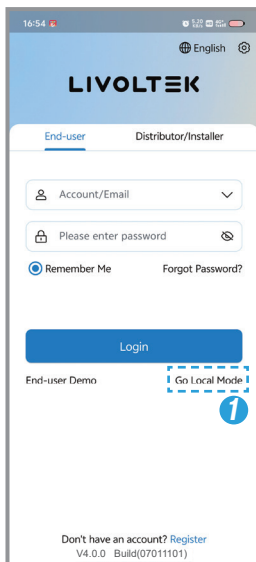


3 Network Configuration

Two methods to connect your APP with the stick logger.


Method 1: scan the QR code on the stick logger to connect it.

- Scan the QR code on the stick logger.
- Click **Join** to connect to the logger and jump to the power flow interface.

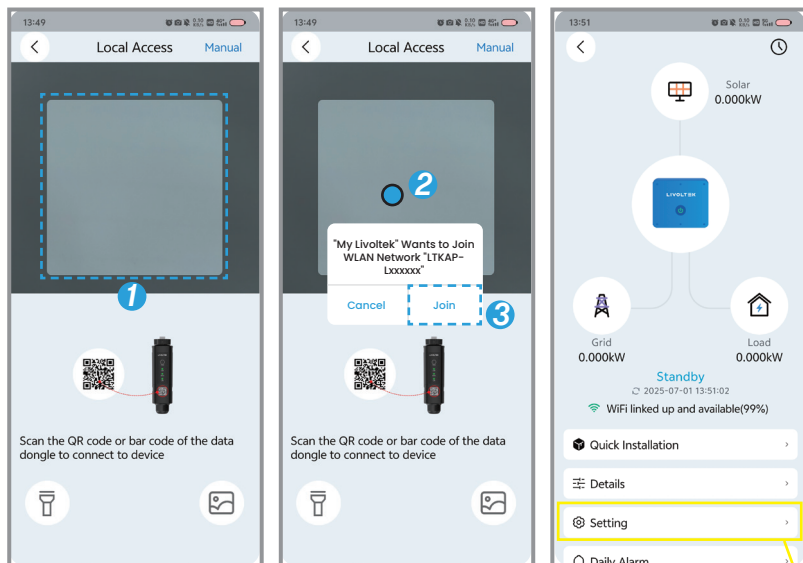

Method 2: Manual connection

- Click **Manual** to enter **Connect to AP** interface, click **Next step** to enter **Connect to AP** interface.
- Select the logger's hotspot and enter its password.
- Go back and enter the power flow interface again.

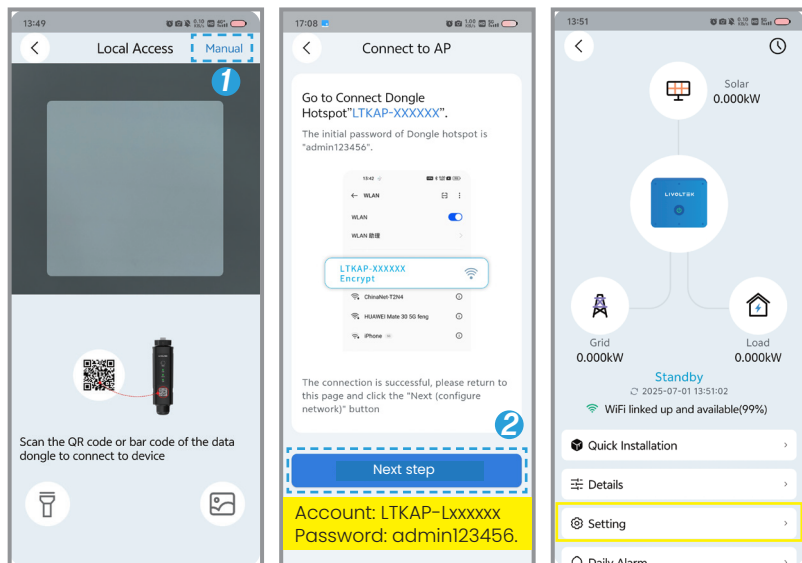


It is the power flow interface in local mode, you can click **Setting** to enter **Settings** interface and perform function setting as needed.

3 Network Configuration

- Click **Setting** > **Network** > **Server Domain** to set the device server domain.

NOTE

- Ensure that the device server domain is consistent with that of the APP server in **General Setting**.

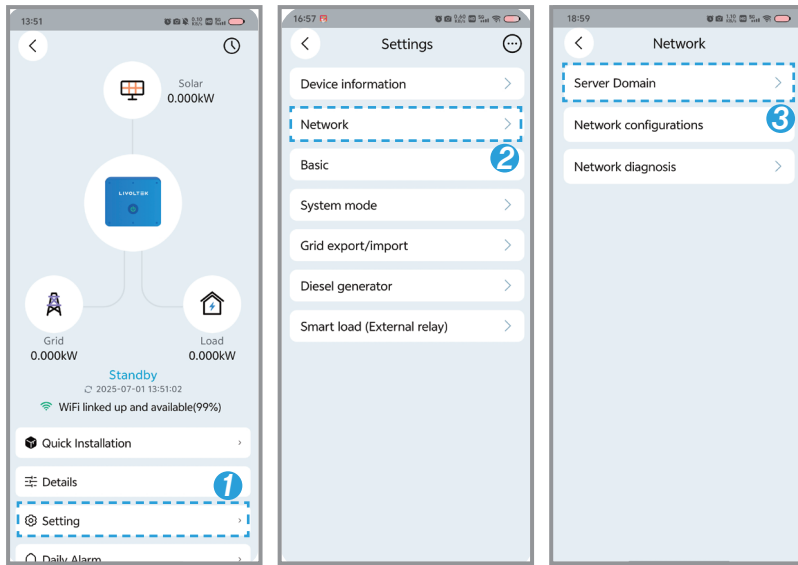

- For Asia, Latin American, Australia and others**

International server:

<https://www.livoltek-portal.com/>


- For Europe, Middle East Regions, Africa EU&MEA server:**

<https://evs.livoltek-portal.com/>

- Click **Network configurations**.
- Enter your home Wi-Fi account and password, click **Next step** to enter **Distribution Network** interface.
- When successfully connect to your home Wi-Fi, click **Next (Configure Network)** and enter **Distribution Network** interface. Click **Start Configuration**, wait until the network configuration process is completed and click **Finish**.

NOTE

- Only support 2.4GHz network. 5G Wi-Fi is unavailable.

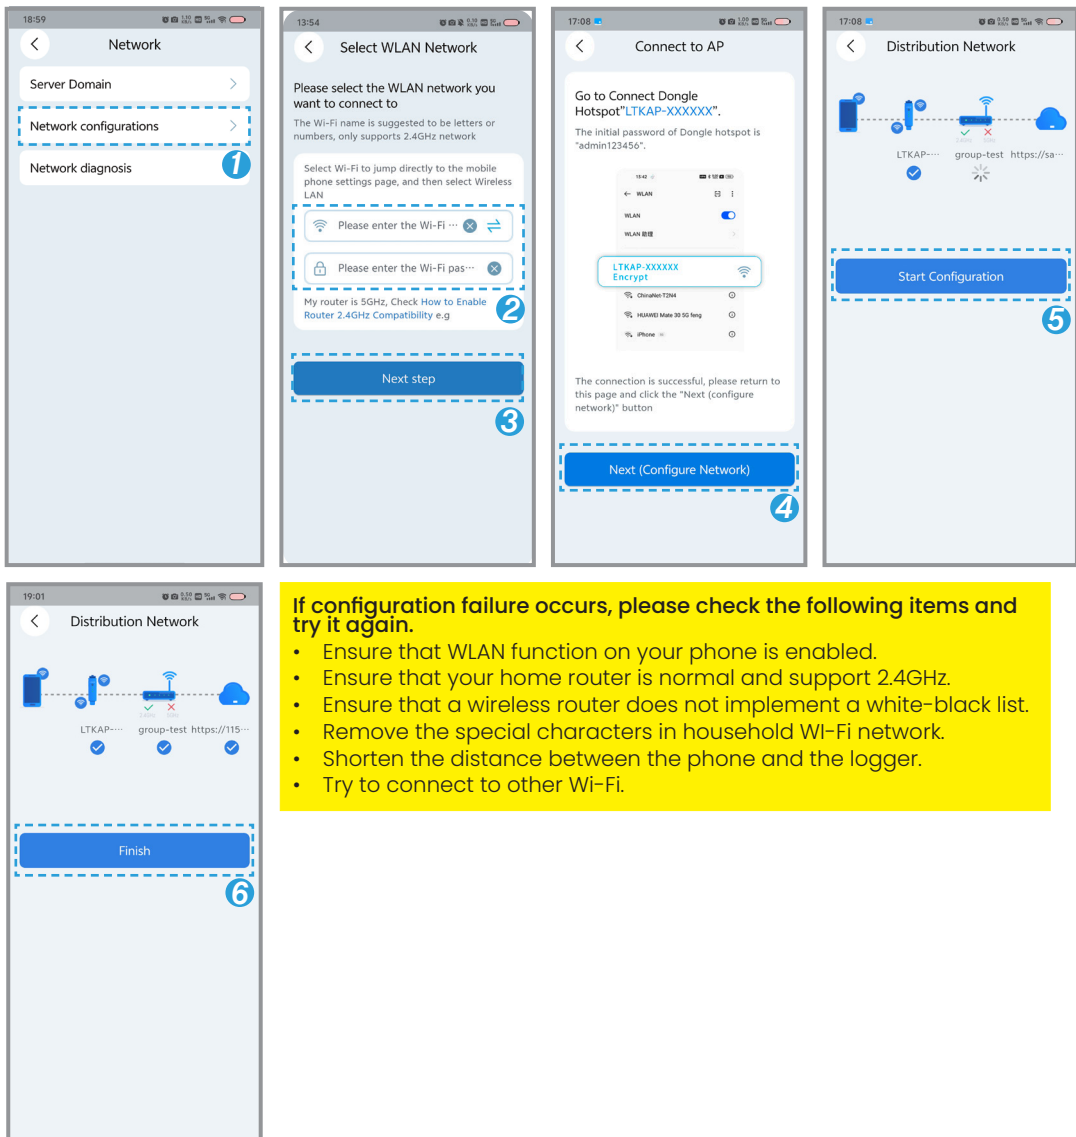



If configuration failure occurs, please check the following items and try it again.

- Ensure that WLAN function on your phone is enabled.
- Ensure that your home router is normal and support 2.4GHz.
- Ensure that a wireless router does not implement a white-black list.
- Remove the special characters in household Wi-Fi network.
- Shorten the distance between the phone and the logger.
- Try to connect to other Wi-Fi.




NOTE


- **APP Download, General Setting and Network Configuration** in local mode must be completed before the following account and site creation and device addition operations.
- Click **Register** in login interface.
- Select **Server for your region**, click **Tap to create an account**.
- Fill in registration information and click **Sign Up** to complete an end-user account registration.

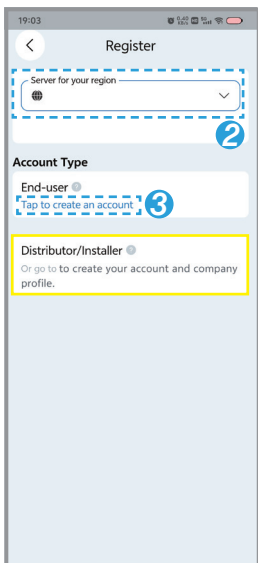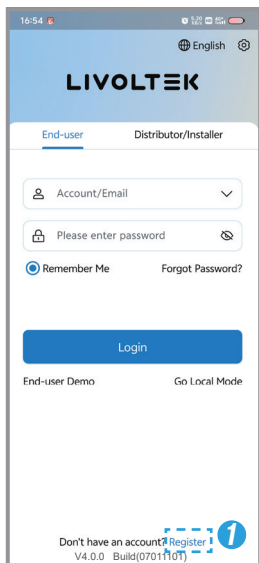

For a Distributor/
Installer account
registration, go to
<https://www.livoltek-portal.com/> to create
your account and
company profile.



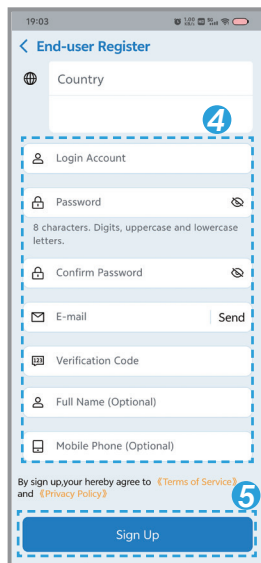


- Click **Create A Site Now**.
- Fill new site informations in interface 2, 3 and 4 below, click **Confirm** to complete a site creation.

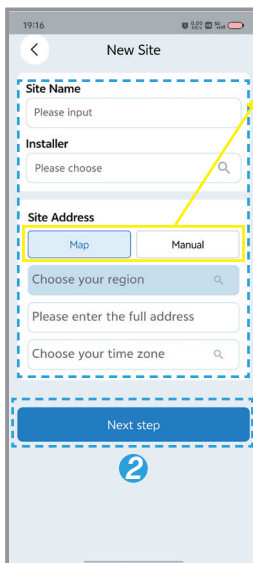

Map and Manual items in Site Address





- Map:** you can choose the region and time zone of your site via location service of your phone. But you should manually enter the full address.
- Manual:** you have to fill in site address information manually.
- Set **System Type** in accordance with your inverter Application scenario.
- Set **Grid-tied Type** with your need and local grid standards.

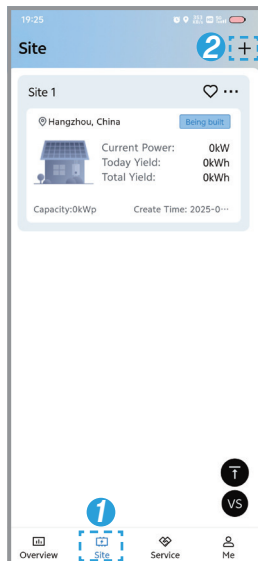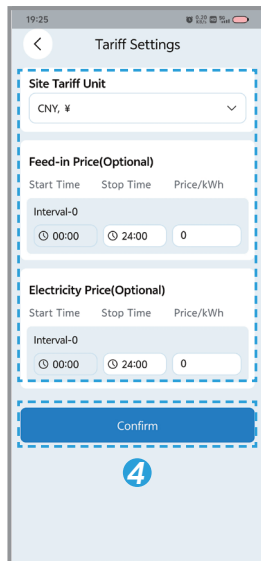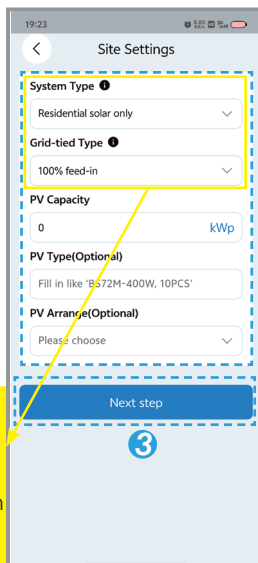

If you already have an account and want to create a new site, click **Site > +** and repeat site information filling in interface 2, 3 and 4.

5 Device Addition


- Click ... at the top right corner of the site.
- Click + **Add**.
- Select **PSD300**.
- Scan the SN series number on the nameplate on the device or enter the device SN series number manually.
- Select **Device model** connected.
- Click **Confirm** and the device is successfully added into your site.

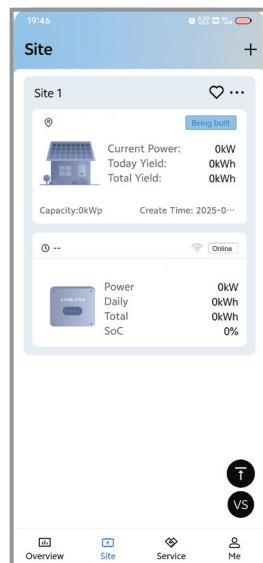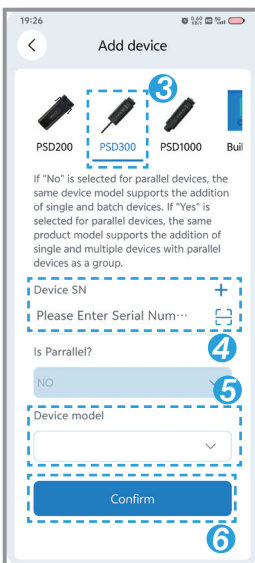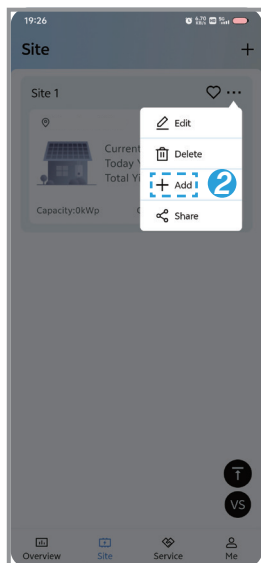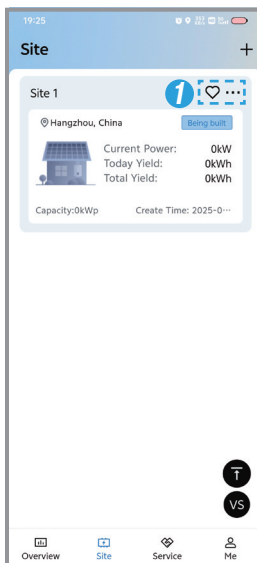

Path:

Method 1: Function setting in local mode

- Refer to the **Network Configuration** section, click **Setting** in the power flow interface and enter **Settings** interface.
- Perform function setting as needed.

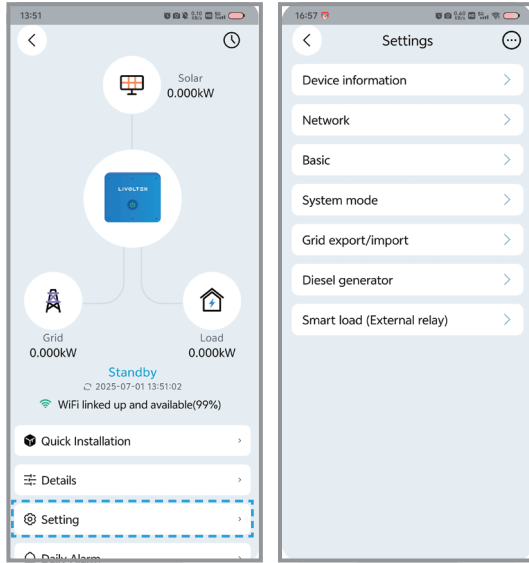

Some inverter function setting interface is taken for an example. Please refer to the actual setting interface of your device connected.

Path:

Method 2: Function setting in APP account

- Click the device (inverter) in your site to enter **Settings** interface.
- Click items in the **Settings** interface to complete settings as needed.

